


DOUBLE SWIVEL SHACKLE OFFSHORE APPLICATIONS - INTERNAL USE 双旋转卸扣（海上平台内用型）

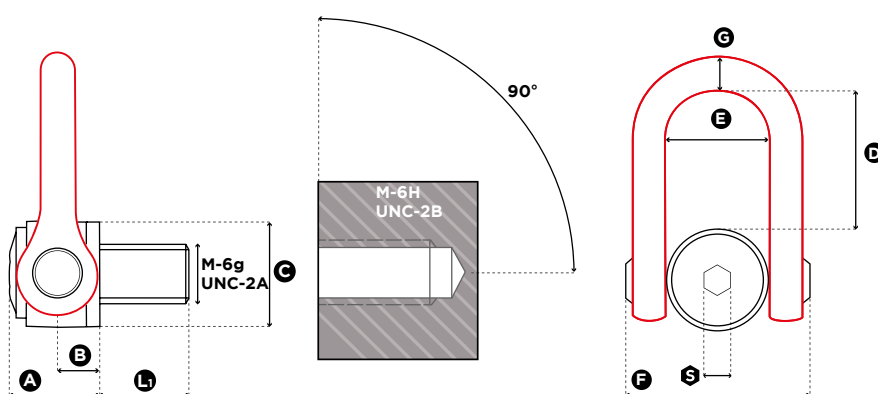

DNVGL-ST-0378 TYPE APPROVAL CERTIFICATE N° TAS00001ZG


1 in = 25.4 mm

Reference 参考型号	Diameter 螺纹直径	SF 5:1 WLL (t)	SF 4:1 WLL (t)	Standard 标准长度 L1 (mm)	Torque 扭矩 (Nm)	S (mm)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	Weight 重量	
														(kg)	(lbs)
DSS M 24 UP	M 24 (x3)	4,50	5,50	36	160	19	61	31	70	98	73	149	33	5,4	11.90
DSS M 30 UP	M 30 (x3.5)	7,70	8,50	45	250	19	61	31	70	98	73	149	33	5,5	12.13
DSS M 36 UP	M 36 (x4)	11,00	12,00	54	320	19	61	31	70	98	73	149	33	5,5	12.13
DSS M 42 UP	M 42 (x4,5)	13,00	15,00	63	400	19	61	31	70	98	73	149	33	5,8	12.79

DNVGL-ST-0378 TYPE APPROVAL CERTIFICATE N° TAS00001ZG

Reference 参考型号	Diameter 螺纹直径	SF 5:1 WLL (lbs)	SF 4:1 WLL (lbs)	Standard 标准长度 L1 (mm)	Torque 扭矩 (ft-lb)	S (inch)	A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	F (inch)	G (inch)	Weight 重量	
														(kg)	(lbs)
DSS U 100 UP	UNC 1" -8	10,000	13,000	36	125	19	61	31	70	98	73	149	33	5,4	11.90
DSS U 125 UP	UNC 1" 1/4-7	15,000	19,000	45	200	19	61	31	70	98	73	149	33	5,4	11.90
DSS U 150 UP	UNC 1" 1/2-6	22,000	27,000	54	240	19	61	31	70	98	73	149	33	5,4	11.90
DSS U 175 UP	UNC 1" 3/4-5	27,000	33,000	63	300	19	61	31	70	98	73	149	33	5,9	13.01

DOUBLE SWIVEL SHACKLE OFFSHORE APPLICATIONS - EXTERNAL USE 双旋转卸扣（海上平台外用型）

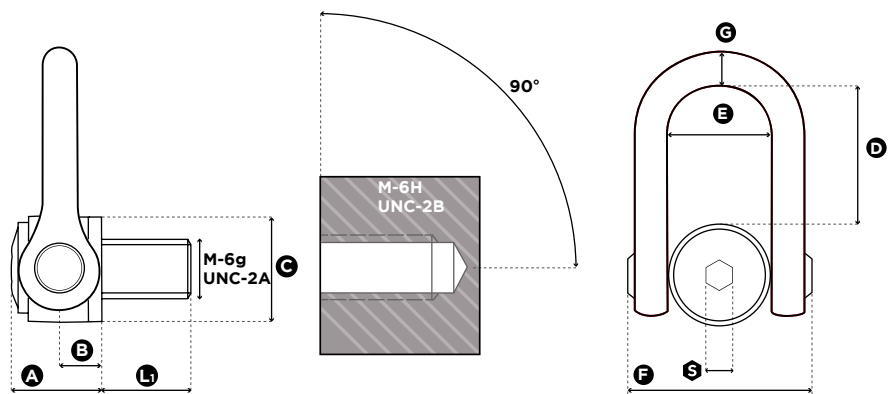

DNV

DNVGL-ST-0378 TYPE APPROVAL CERTIFICATE N° TAS00001ZG

1 in = 25.4 mm

Reference 参考型号	Diameter 螺纹直径	SF 5:1 WLL (t)	SF 4:1 WLL (t)	Standard 标准长度 L1 (mm)	Torque 扭矩 (Nm)	S (mm)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	Weight 重量	
														(kg)	(lbs)
OS.DSS M 24 UP	M 24 (x3)	4,50	5,50	36	160	19	61	31	70	98	73	149	33	5,4	11.90
OS.DSS M 30 UP	M 30 (x3.5)	7,70	8,50	45	250	19	61	31	70	98	73	149	33	5,5	12.13
OS.DSS M 36 UP	M 36 (x4)	11,00	12,00	54	320	19	61	31	70	98	73	149	33	5,5	12.13
OS.DSS M 42 UP	M 42 (x4,5)	13,00	15,00	63	400	19	61	31	70	98	73	149	33	5,8	12.79

DNVGL-ST-0378 TYPE APPROVAL CERTIFICATE N° TAS00001ZG

Reference 参考型号	Diameter 螺纹直径	SF 5:1 WLL (lbs)	SF 4:1 WLL (lbs)	Standard 标准长度 L1 (mm)	Torque 扭矩 (ft-lb)	S (mm)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	Weight 重量	
														(kg)	(lbs)
OS.DSS U 100 UP	UNC 1" -8	10,000	13,000	36	125	19	61	31	70	98	73	149	33	5,4	11.90
OS.DSS U 125 UP	UNC 1" 1/4-7	15,000	19,000	45	200	19	61	31	70	98	73	149	33	5,4	11.90
OS.DSS U 150 UP	UNC 1" 1/2-6	22,000	27,000	54	240	19	61	31	70	98	73	149	33	5,4	11.90
OS.DSS U 175 UP	UNC 1" 3/4-5	27,000	33,000	63	300	19	61	31	70	98	73	149	33	5,9	13.01