

QL.DSR

Gradup




QLR

Quick Lift Ring

QUICK LIFT DOUBLE SWIVEL RING 快装双旋转吊环

METRIC THREADS / 公制螺纹

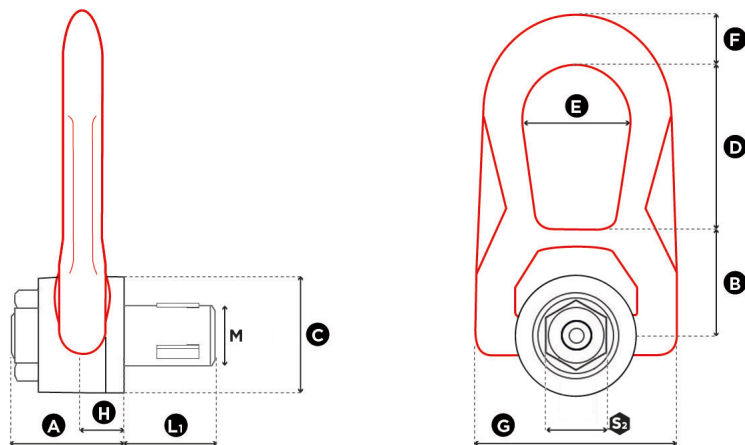

1 in = 25.4 mm

Reference 参考型号	Diameter 螺纹直径	SF 5:1 WLL (t)	Standard 标准长度 L1 (mm)	Torque 扭矩 (Nm)	S2 (mm)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	Weight 重量	
														(kg)	(lbs)
QL.DSR M 8	M 8 (x1,25)	0,25	17,5	20	18	31	30	30	38	27	14	53	9,5	0,3	0.66
QL.DSR M 10	M 10 (x1,5)	0,40	19,5	30	18	31	30	30	38	27	14	53	9,5	0,3	0.66
QL.DSR M 12	M 12 (x1,75)	0,65	23	60	27	40	40	45	53	38	17	76	13	0,9	1.98
QL.DSR M 14	M 14 (x2)	0,70	23	80	27	40	40	45	53	38	17	76	13	0,9	1.98
QL.DSR M 16	M 16 (x2)	1,05	27	100	27	40	40	45	53	38	17	76	13	0,9	1.98
QL.DSR M 20	M 20 (x2,5)	1,70	30	160	40	55	55	60	83	55	25	115	19	2,6	5.73
QL.DSR M 24	M 24 (x3)	2,50	36	180	40	55	55	60	83	55	25	115	19	2,6	5.73
QL.DSR M 27	M27 (x3)	3,00*	40	*	40	55	55	60	83	55	25	115	19	2,7	5.95
QL.DSR M 30	M30 (x3,5)	3,50	45	200	40	55	55	60	83	55	25	115	19	2,7	5.95

* In certification process / En cours d' homologation / In Entwicklungsphase / En proceso de homologación

11.2024

36

QL.DSR



Gradup



QLR Quick Lift Ring

QUICK LIFT DOUBLE SWIVEL RING 快装双旋转吊环

UNC THREADS / 美制统一粗牙螺纹

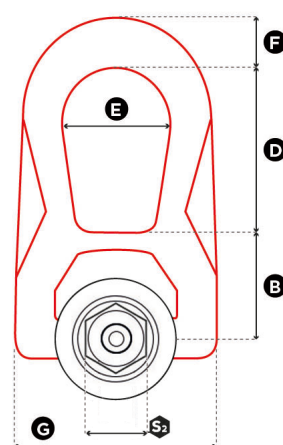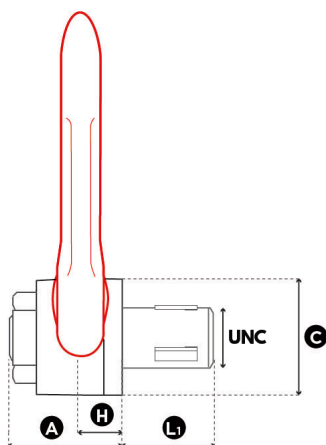

1 in = 25.4 mm

Reference 参考型号	Diameter 螺纹直径	SF 5:1 WLL (lbs)	Standard 标准长度 L1 (mm)	Torque 扭矩 (ft-lb)	S2 (mm)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	Weight 重量	
														(kg)	(lbs)
QL.DSR U 050	UNC 1/2"-13	1.300	23	45	27	40	40	45	53	38	17	76	13	0,9	1.98
QL.DSR U 075	UNC 3/4"-10	3.400*	30	*	40	55	55	60	83	55	25	115	19	2,6	5.73
QL.DSR U 100	UNC 1"-8	5.000*	36	*	40	55	55	60	83	55	25	115	19	2,6	5.73

* In certification process / En cours d' homologation / In Entwicklungsphase / En proceso de homologación