


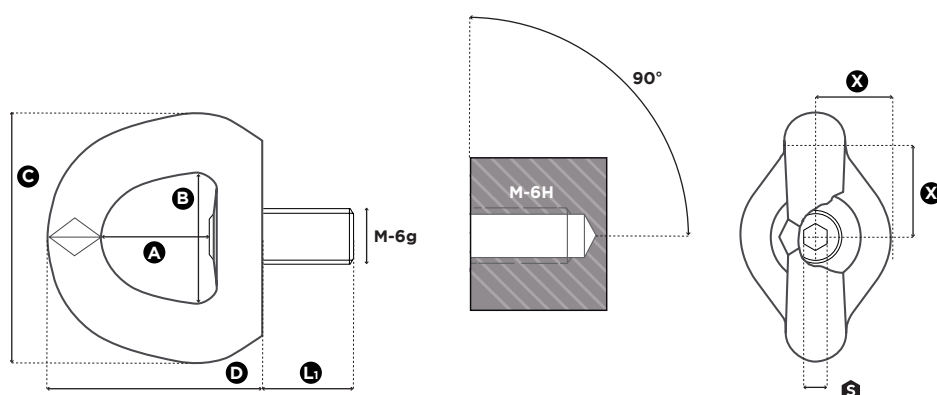


1 in = 25.4 mm

Reference 参考型号	Diameter 螺纹直径	SF 5:1 WLL (t)	SF 4:1 WLL (t)	Standard 标准长度 L ₁ (mm)	Torque 扭矩 (Nm)		 (mm)	A (mm)	B (mm)	C (mm)	D (mm)	Weight 重量	
												(kg)	(lbs)
SS.SEB M 8	M 8 (x1,25)	0,20	0,20	14	6	20	6	30	34	60	57	0,24	0.53
SS.SEB M 10	M 10 (x1,5)	0,30	0,30	17	10	20	6	30	34	60	57	0,24	0.53
SS.SEB M 12 0,4t	M 12 (x1,75)	0,40	0,40	21	15	20	6	30	34	60	57	0,24	0.53
SS.SEB M 12	M 12 (x1,75)	0,55	0,55	21	15	35	8	38	45	90	80	0,80	1.76
SS.SEB M 16	M 16 (x2)	1,20	1,20	27	50	35	8	38	45	90	80	0,82	1.81
SS.SEB M 20	M 20 (x2,5)	1,50	1,50	30	100	35	8	38	45	90	80	0,84	1.85
SS.SEB M 24	M 24 (x3)	2,50	2,50	36	100	50	8	38	45	90	80	0,90	1.98

SS.SEB

STAINLESS STEEL SWIVEL EYE BOLT 不锈钢旋转吊环螺栓

UNC THREADS / 美制统一粗牙螺纹

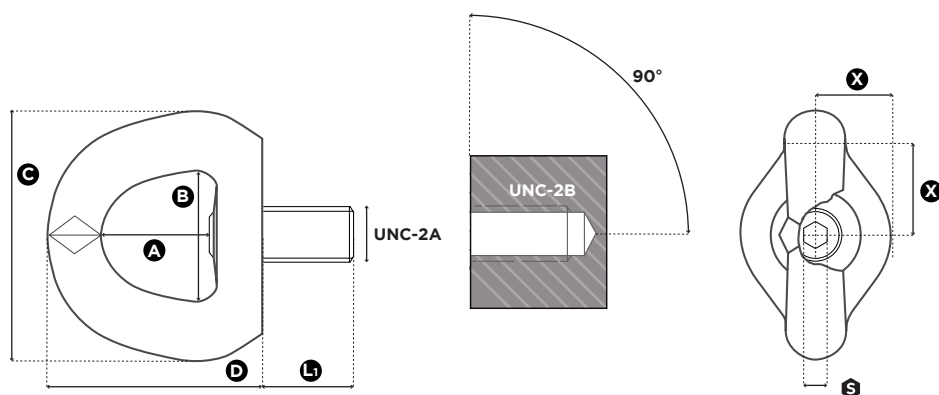

1 in = 25.4 mm

Reference 参考型号	Diameter 螺纹直径	SF 5:1 WLL (lbs)	SF 4:1 WLL (lbs)	Standard 标准长度 L1 (mm)	Torque 扭矩 (ft-lb)			A (mm)	B (mm)	C (mm)	D (mm)	Weight 重量	
												(kg)	(lbs)
SS.SEB U 038	UNC 3/8"-16	550	550	17	8	20	6	30	34	60	57	0,24	0.53
SS.SEB U 050	UNC 1/2"-13	880	880	21	12	20	6	30	34	60	57	0,24	0.53

11.2024
45