



PE.SEB SS.PE.SEB

METRIC THREADS

FALL PROTECTION ANCHORAGE POINT

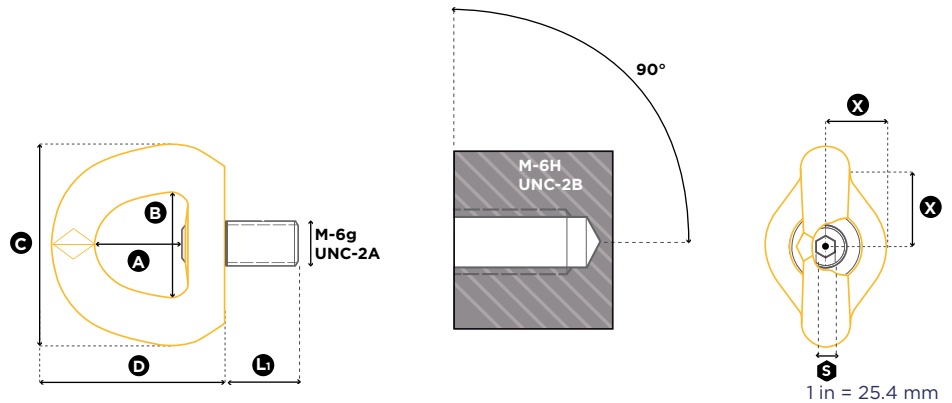

| Reference | Diameter | Number of persons | | Standard L ₁ (mm) | Torque (Nm) | | S (mm) | A (mm) | B (mm) | C (mm) | D (mm) | Weight | |
|-------------|--------------|-------------------|-------------------|------------------------------|-------------|----|--------|--------|--------|--------|--------|--------|-------|
| | | EN 795:2012 | CEN/TS 16415:2013 | | | | | | | | | (kg) | (lbs) |
| PE.SEB M 12 | M 12 (x1,75) | 1 pers. | 2 pers. | 21 | 15 | 20 | 6 | 30 | 34 | 60 | 57 | 0,24 | 0.53 |
| PE.SEB M 16 | M 16 (x2) | 1 pers. | 2 pers. | 27 | 50 | 35 | 8 | 38 | 45 | 88 | 80 | 0,80 | 1.76 |
| PE.SEB M 20 | M 20 (x2,5) | 1 pers. | 2 pers. | 30 | 100 | 35 | 8 | 38 | 45 | 88 | 80 | 0,80 | 1.76 |

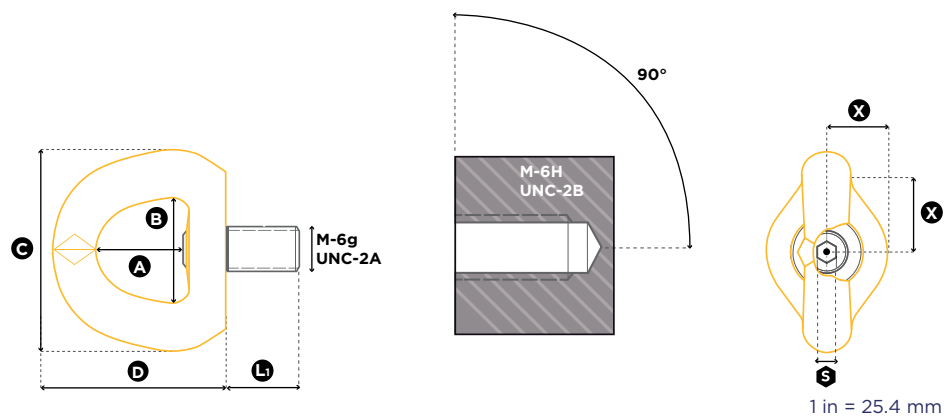

| Reference | Diameter | Number of persons | | Standard L ₁ (mm) | Torque (Nm) | | S (mm) | A (mm) | B (mm) | C (mm) | D (mm) | Weight | |
|----------------|--------------|-------------------|-------------------|------------------------------|-------------|----|--------|--------|--------|--------|--------|--------|-------|
| | | EN 795:2012 | CEN/TS 16415:2013 | | | | | | | | | (kg) | (lbs) |
| SS.PE.SEB M 12 | M 12 (x1,75) | 1 pers. | 2 pers. | 21 | 15 | 35 | 8 | 38 | 45 | 90 | 80 | 0,80 | 1.76 |
| SS.PE.SEB M 16 | M 16 (x2) | 1 pers. | 2 pers. | 27 | 50 | 35 | 8 | 38 | 45 | 90 | 80 | 0,82 | 1.81 |
| SS.PE.SEB M 20 | M 20 (x2,5) | 1 pers. | 2 pers. | 30 | 100 | 35 | 8 | 38 | 45 | 90 | 80 | 0,84 | 1.85 |
| SS.PE.SEB M 24 | M 24 (x3) | 1 pers. | 2 pers. | 36 | 150 | 35 | 8 | 38 | 45 | 90 | 80 | 0,90 | 1.98 |