




CENTRAL SAFETY SHACKLE 中央安全卸扣

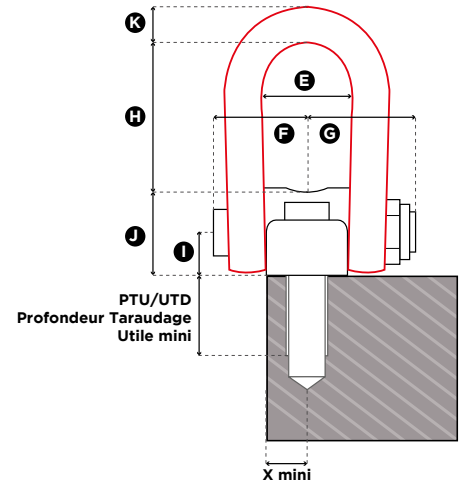

Lifting	0 - 90°
提升	0 - 90°
Levage	0 - 90°
Hebung	0 - 90°
Elevación	0 - 90°

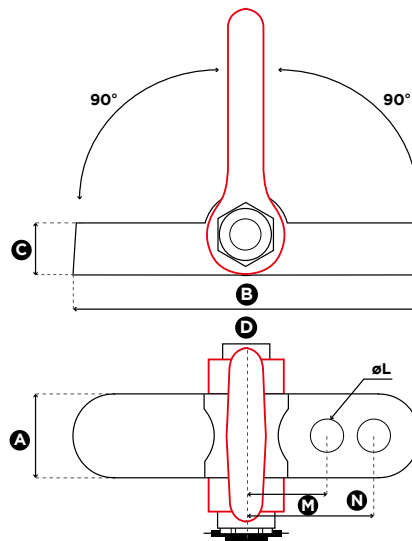

1 in = 25.4 mm

Reference 参考型号	SF 4:1 WLL (t)	X mini	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	I (mm)	J (mm)	K (mm)	Weight 重量	
														(kg)	(lbs)
CSS 20	20	40	80	220	50	62	90	88	98	132	38	76	41,0	12,7	28.00
CSS 32	32	40	80	330	50	62	90	88	98	132	38	76	41,0	16,7	36.82
CSS 55	55	53	105	540	85	191	184	160	170	267	85	175	79,5	90,0	198.42

Drilling and fastening by screws DIN 912-12.9 / 钻孔并用螺钉固定 DIN 912-12.9 / Perçage et fixation par vis DIN 912-12.9 / Bohrung und Montage mit Schrauben DIN 912-12.9 / Taladro y fijación por DIN 912-12.9

1 in = 25.4 mm

Reference 参考型号	Drilling/钻孔/Perçage/ Bohrung/Taladro			PTU/ UTD	Screw/螺钉/Vis/Schraube/Tornillo					
	Ø L	M (mm)	N (mm)	Useful Minimum Thread Depth 最小有效螺 纹深度 (mm)	Quantity 数量 Quantité Menge Cantidad	Model 型号 Modèle Modell Modelo	Length 长度 Longueur Länge Longitud (mm)	Head / 头部 / Tête / Schraubenkopf / Encima		Torque 扭矩 (Nm)
								Diam 直径 (mm)	Height / 高度 / Hauteur / Höhe / Altura (mm)	
CSS 20	38	70	/	54	2	M36	100	54	36	600
CSS 32	38	70	130	54	4	M36	100	54	36	600
CSS 55	50	133	210	85	4	M48	160	72	48	600