


SS.FE.DSR

STAINLESS STEEL FEMALE DOUBLE SWIVEL RING

UNC THREADS

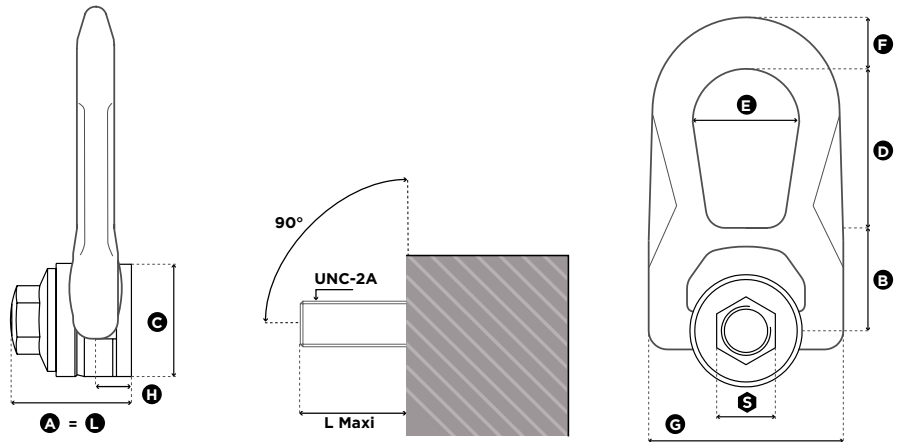

1 in = 25.4 mm

| Reference | Diameter | SF 5:1 WLL (lbs) | SF 4:1 WLL (lbs) | L Maxi (mm) | Torque (ft-lb) | S (mm) | A (mm) | B (mm) | C (mm) | D (mm) | E (mm) | F (mm) | G (mm) | H (mm) | Weight (kg) |
|-----------------|--------------|------------------|------------------|-------------|----------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|-------------|
| SS.FE.DSR U 516 | UNC 5/16"-18 | 600 | 650 | 43 | 5 | 20 | 43 | 40 | 45 | 53 | 38 | 17 | 76 | 13 | 0,9 |
| SS.FE.DSR U 038 | UNC 3/8"-16 | 1,000 | 1,000 | 43 | 8 | 20 | 43 | 40 | 45 | 53 | 38 | 17 | 76 | 13 | 0,9 |
| SS.FE.DSR U 050 | UNC 1/2"-13 | 1,800 | 1,800 | 43 | 12 | 20 | 43 | 40 | 45 | 53 | 38 | 17 | 76 | 13 | 0,9 |
| SS.FEDSR U 058 | UNC 5/8"-11 | 2,500 | 3,000 | 43 | 40 | 20 | 43 | 40 | 45 | 53 | 38 | 17 | 76 | 13 | 0,9 |
| SS.FE.DSR U 075 | UNC 3/4"-10 | 3,600 | 3,800 | 62 | 80 | 24 | 62 | 55 | 58 | 83 | 56 | 25 | 115 | 19 | 2,6 |
| SS.FE.DSR U 078 | UNC 7/8"-9 | 5,000 | 5,100 | 62 | 90 | 24 | 62 | 55 | 58 | 83 | 56 | 25 | 115 | 19 | 2,6 |

03.2020