


# DSS

## GradUp



UNC THREADS

### DOUBLE SWIVEL SHACKLE

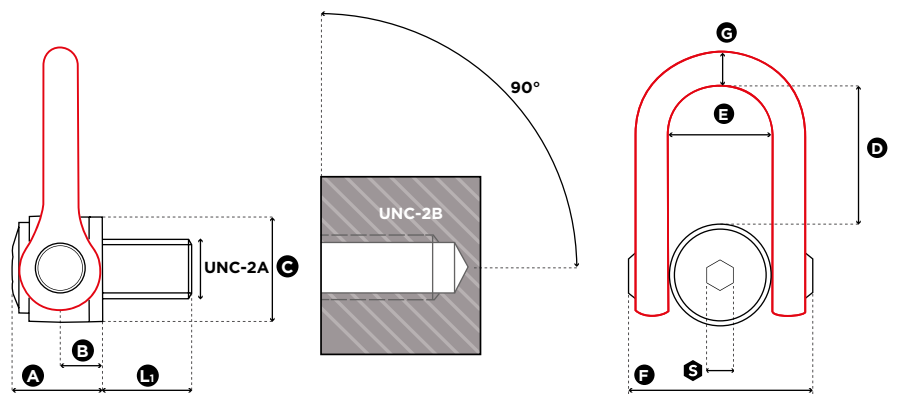

1 in = 25.4 mm

| Reference    | Diameter     | SF 5:1 WLL (lbs) | SF 4:1 WLL (lbs) | Standard L1 (mm) | Torque (ft-lb) | S (mm) | A (mm) | B (mm) | C (mm) | D (mm) | E (mm) | F (mm) | G (mm) | Weight (kg) |
|--------------|--------------|------------------|------------------|------------------|----------------|--------|--------|--------|--------|--------|--------|--------|--------|-------------|
| DSS U 100 UP | UNC 1"-8     | 10,000           | 13,000           | 36               | 125            | 19     | 61     | 31     | 70     | 98     | 73     | 149    | 33     | 5,4         |
| DSS U 125 UP | UNC 1" 1/4-7 | 15,000           | 19,000           | 45               | 200            | 19     | 61     | 31     | 70     | 98     | 73     | 149    | 33     | 5,4         |
| DSS U 138 UP | UNC 1" 3/8-6 | 21,000           | 22,000           | 54               | 240            | 19     | 61     | 31     | 70     | 98     | 73     | 149    | 33     | 5,4         |
| DSS U 150 UP | UNC 1" 1/2-6 | 22,000           | 27,000           | 54               | 240            | 19     | 61     | 31     | 70     | 98     | 73     | 149    | 33     | 5,4         |
| DSS U 175 UP | UNC 1" 3/4-5 | 27,000           | 33,000           | 63               | 300            | 19     | 61     | 31     | 70     | 98     | 73     | 149    | 33     | 5,9         |
| DSS U 200 UP | UNC 2"-4,5   | 38,000           | 50,000           | 76               | 450            | 19     | 79     | 38     | 90     | 123    | 91     | 182    | 45     | 11,1        |
| DSS U 250 UP | UNC 2" 1/2-4 | 48,500           | 55,000           | 90               | 450            | 19     | 79     | 38     | 95     | 123    | 91     | 182    | 45     | 12,2        |

10.2021