


### TRIPLE SWIVEL RING

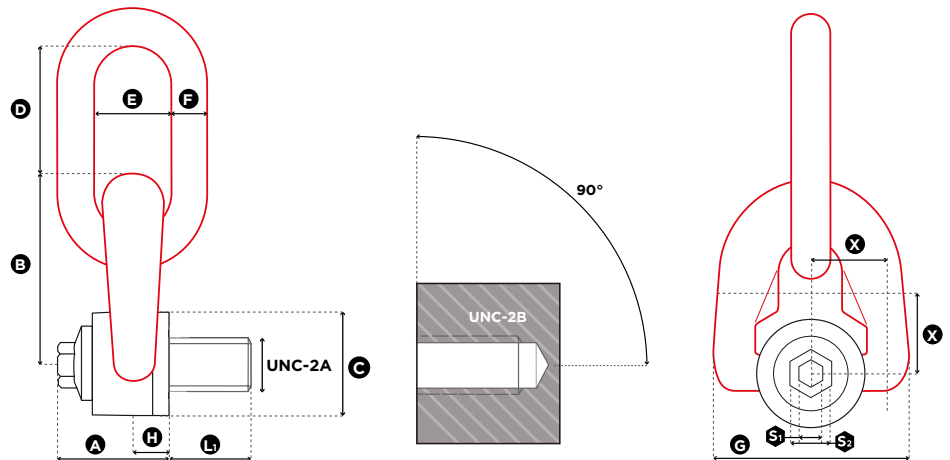

1 in = 25.4 mm

Reference	Diameter	SF 5:1 WLL (lbs)	Standard L <sub>1</sub> (mm)	Torque (ft-lb)	$\frac{X}{S_1}$	S <sub>1</sub> (mm)	S <sub>2</sub> (mm)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	Weight (kg)
TSR U 516	UNC 5/16"-18	1,000	15	7	18	8	16	33	56	30	41	25	10	58	9,5	0,4
TSR U 038	UNC 3/8"-16	1,300	18	8	18	8	16	33	56	30	41	25	10	58	9,5	0,4
TSR U 050	UNC 1/2"-13	2,400	21	12	18	8	16	33	56	30	41	25	10	58	9,5	0,4
TSR U 058	UNC 5/8"-11	3,900	27	40	24	8	20	45	81	45	56	37	14	79	13,0	1,1
TSR U 075	UNC 3/4"-10	5,250	30	80	24	8	20	45	81	45	56	37	14	79	13,0	1,2
TSR U 078*	UNC 7/8"-9	6,600	33	90	41	14	24	62	84	60	80	45	20	106	19,0	2,7
TSR U 100*	UNC 1"-8	10,000	36	125	41	14	24	62	84	60	80	45	20	106	19,0	2,8
TSR U 125*	UNC 1" 1/4-7	14,000	46	200	41	14	24	84	146	80	111	71	30	106	26,5	7,1
TSR U 150*	UNC 1" 1/2-6	20,000	61	240	54	19	30	84	146	80	111	71	30	148	26,5	7,7

1 in = 25.4 mm

Reference	Diameter	SF 4:1 WLL (lbs)	Standard L <sub>1</sub> (mm)	Torque (Nm)	$\frac{X}{S_1}$	S <sub>1</sub> (mm)	S <sub>2</sub> (mm)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	Weight (kg)
TSR U 200	UNC 2" 4,5	50,000	76	450	66	19	30	104	184	110	135	90	42	190	33,0	17,7

\* On request / Sur demande / Auf Anfrage / Bajo solicitud